

NEC ESMPRO ServerAgentService Ver. 2.3 Installation Guide (Linux)

Chapter 1 Summary

Chapter 2 Installation and Upgrade

Chapter 3 Uninstallation

Chapter 4 Appendix

Contents

Contents	2
Conventions Used in This Document.....	4
Notations used in the text.....	4
Trademarks	5
Open-source software	6
Warnings and Additions to This Document.....	7
Latest editions	7
Chapter 1 Summary	8
1. Introduction	9
2. System Requirements.....	10
3. Function summary	11
3.1 CIM Provider	11
3.2 Monitoring Service	12
Chapter 2 Installation and Upgrade.....	14
1. Before installation	15
1.1 Pattern of installation.....	15
1.2 Setting before the installation	16
1.2.1 Check for necessary packages	16
1.2.2 Setting of SELinux	21
2. Installation and Upgrade	24
2.1 Starter Pack	27
2.2 EXPRESSBUILDER.....	29
2.3 Utility Disk	31
2.4 ZIP file	33
3. After installation	35
3.1 Setting after the installation	36
3.1.1 Workaround of openwsmand	36
3.1.2 Setting of access control	41
3.2 Settings of NEC ESMPro Manager	44
3.3 Setting of Manager (SNMP)	45
3.4 Setting of Express Report Service	47
Chapter 3 Uninstallation	48
1. Uninstallation	49
Chapter 4 Appendix.....	50
1. The contents which an installation script sets	51
1.1 Setting before the installation	51
1.1.1 Setting of sbvim-sfcb.....	51

1.1.2	Setting of openwsman.conf.....	51
1.1.3	Setting of access.conf.....	52
1.1.4	Setting of CIM Server.....	53
1.1.5	Setting of tog-pegasus.....	53
1.1.6	Setting of snmpd.....	53
1.1.7	Setting of ipmi.....	54
1.1.8	Setting of NetworkManager-wait-online.service.....	54
1.1.9	Creating self signed certificate of openwsman.....	54
1.1.10	Setting of openwsmand.....	56
1.1.11	[Action After Report] is disable shutdown at [Temp Lower Error] events.	57
2.	About tools.....	58
2.1	The obstacle information collection tool (collectsa.sh)	58
2.2	Check for necessary packages tool (check_packages.sh).....	60
3.	LICENSE.....	62

Conventions Used in This Document

Notations used in the text

In addition to safety-related symbols urging caution, two other types of notations are used in this document. These notations have the following meanings.

Important	Indicates critical items that must be followed when handling operating software.
Note	Indicates items that must be confirmed when operating software.
Tips	Indicates information that is helpful to keep in mind when using this software.

Trademarks

Linux is a trademark or registered trademark of Linus Torvalds in Japan and other countries.

Red Hat and Red Hat Enterprise Linux are trademarks or registered trademarks of Red Hat, Inc. in the United States and other countries.

All other product, brand, or trade names used in this publication are the trademarks or registered trademarks of their respective trademark owners.

(TM) or (R) mark is not specified in this document.

Open-source software

Software consented to based on following license is included in this product.

GNU LESSER GENERAL PUBLIC LICENSE (LGPL)

libesmtplib.dll (Esmpro-Expsrv package)

Net-SNMP

ESMntagent (Esmpro-Cmnsrv package)

libutil.so (Esmpro-Cmnsrv package)

MD5

amrpop.dll (Esmpro-Expsrv package)

In case of iLO support model, software consented to based on following license is included in installation modules of this product.

Refer to a file bundled by software for a license.

Apache License

esmsmsrv.py (Esmpro-Selsrv package)

jsonpath-rw

python-illorest-library

recordtype

MIT

pip

urlparse2

validictory

BSD License

jsonpatch

Refer to chapter 4 (3.LICENSE) for the license.

Refer to "Open-source software that NEC ESMPRO ServerAgentService for Linux uses" showing in the next website.

https://www.express.nec.co.jp/linux/dload/esmpro/esm/private/license_en.html

Warnings and Additions to This Document

1. Unauthorized reproduction of the contents of this document, in part or in its entirety, is prohibited.
2. This document is subject to change at any time without notice.
3. Do not make copies or alter the document content without permission from NEC Corporation.
4. If you have any concerns, or discover errors or omissions in this document, contact your sales representative.
5. Regardless of article 4, NEC Corporation assumes no responsibility for effects resulting from your operations.
6. The sample values used in this document are not actual values.

<p>Keep this document for future use.</p>
--

Latest editions

This document was created based on the information available at the time of its creation. The screen images, messages and procedures are subject to change without notice. Substitute as appropriate when content has been modified.

You can download the latest version of NEC ESMPRO ServerAgentService from the URL.

<http://www.58support.nec.co.jp/global/download/index.html>

Summary

This chapter describes summary of NEC ESMPRO ServerAgentService.

1. Introduction

This section describes Introduction.

2. System Requirements

This section describes System Requirements.

3. Function summary

This section describes Function summary.

***I*. Introduction**

The installation of server management utility "NEC ESMPRO ServerAgentService" is described in this document.

NEC ESMPRO Manager and NEC ESMPRO ServerAgentService are software packages for server management aimed at the stable operation and the efficient management of servers. This software tracks configuration information and operation statuses of the server resources, detects server failures, and reports the alert to the system administrator, to prevent or quickly respond to such failures.

Read this book carefully to have you use this product definitely before using it.
You explain the contents with this book for the people whom the function of the Linux OS, an operation method are understood by enough.

2. System Requirements

NEC ESMPRO ServerAgentService requires the following hardware and software:

Hardware

Machine:

NEC Express5800 series

Used memory:

65MB and more (Service Mode)

35MB and more (Non-Service Mode)

Free space of hard disk:

75MB and more

Software

Operating System:

Red Hat Enterprise Linux 8 (x86_64)

Red Hat Enterprise Linux 9 (x86_64)

Management Software

Software which manages this product:

NEC ESMPRO Manager (Windows)

When monitoring a management target server from NEC ESMPRO Manager, use software that comes bundled with the server except some models, or use the latest version.

Tips

The latest version is recommended.

You can download the latest version of NEC ESMPRO Manager from the URL.

<http://www.58support.nec.co.jp/global/download/index.html>

3. Function summary

NEC ESMPRO ServerAgentService provides the CIM Provider and the Monitoring Service to NEC ESMPRO Manager. "Service Mode" and "Non-Service Mode" exist in NEC ESMPRO ServerAgentService. Use BMC or iLO management for monitoring of the hardware.

With the Service Mode, it provides the CIM Provider and the Monitoring Service.

With the Non-Service Mode, it provides the CIM Provider. It not provides the Monitoring Service.

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv
```

It is Service Mode when Esmpro-Cmnsrv package was displayed.

```
Esmpro-Cmnsrv-"Version Information"
```

3.1 CIM Provider

• Esmpro-Provider package

Function	Class
Note	
ESMPRO Information Provider	ESM_GeneralInformation ESM_VideoController ESM_Network ESM_Alive
This provider provides the information that is dearth in Linux standard provider.	
CPU Load Information Provider	ESM_Processor
This provider provides the CPU load information of 1 minute load average.	
Physical Memory Information Provider	ESM_PhysicalMemory
This provider provides the physical memory information.	
Virtual Memory Information Provider	ESM_VirtualMemory
This provider provides the virtual memory information.	
Page File Information Provider	ESM_PageFile
This provider provides the page file information.	

• Esmpro-strgfs-Provider package

Function	Class
Note	
Storage Information Provider	ESM_StorageThread
This provider provides the storage information. iLO support model is not supported.	
Filesystem Information Provider	ESM_FileSystemThread
This provider provides the filesystem information.	

3.2 Monitoring Service

• Esmpro-Cmnsrv package

Function	Process	Source of Alert
Note		
NEC ESMPRO ServerAgentService Basic service	ESMntserver	None
This process controls interprocess communication of NEC ESMPRO ServerAgentService.		
Monitoring Thread Start and Stop Service	ESMcmn	None
This process starts or stops in the following threads. When a state changed, monitoring thread record in a syslog.		
Syslog Monitoring and Report service	ESMamvmain	None
This process is monitoring syslog. Reports it in report method. It provides to reports it to a manager using TCP/IP.		
SNMP report service	ESMntagent	None
This process provides to reports it to a manager using SNMP.		

- Monitoring Thread

Function	Class	Source of Alert
Note		Default
CPU Load	ESM_Processor	ESMCPUERF
This thread is monitoring CPU load.	Utilization Rate : Load For 1 min Sample Interval (Seconds) : 10 Monitoring : Disable Fatal %t : 100 Reset (Error) : 97 Warning % : 95 Reset (Warning) : 92	
Physical Memory Used	ESM_PhysicalMemory	ESMMEMORYUSAGE
This thread is monitoring physical memory used.	Sample Interval (Seconds) : 60 Monitoring : Disable Fatal (MB) : 95% of Total Capacity Reset (Error) (MB) : 90% of Total Capacity Warning (MB) : 85% of Total Capacity Reset (Warning) (MB) : 80% of Total Capacity	
Virtual Memory Used	ESM_VirtualMemory	ESMMEMORYUSAGE
This thread is monitoring virtual memory used.	Sample Interval (Seconds) : 60 Monitoring : Disable Fatal (MB) : 95% of Total Capacity Reset (Error) (MB) : 90% of Total Capacity Warning (MB) : 85% of Total Capacity Reset (Warning) (MB) : 80% of Total Capacity	
Page File Used	ESM_PageFile	ESMMEMORYUSAGE
This thread is monitoring page file used.	Sample Interval (Seconds) : 60 Monitoring : Disable Fatal (MB) : 95% of Total Capacity Reset (Error) (MB) : 90% of Total Capacity Warning (MB) : 85% of Total Capacity Reset (Warning) (MB) : 80% of Total Capacity	

Function	Class	Source of Alert
Note	Default	
Storage	ESM_StorageThread	ESM STORAGE SERVICE
This thread is monitoring simple substance storage. iLO support model is not supported.	Sample Interval (Seconds) : 60 SMART Monitoring : Enable	
Filesystem	ESM_FileSystemThread	ESMFSSERVICE
This thread is monitoring filesystem.	Sample Interval (Seconds) : 60 Monitoring : Enable Fatal (MB) : 1% of Total Capacity Warning (MB) : 10% of Total Capacity	
CPU and Memory Degenerate	None	ESMCOMMONSERVICE
This thread is monitoring CPU and memory degenerate in start ESMcmn. iLO support model is not supported.		

- Esmpro-Selsrv package

Function	Process	Source of Alert
Note		
Hardware Log Monitoring Service	ESMsmssrv	ESMCOMMONSERVICE
This thread is monitoring Hardware Log. It records in a syslog, and reports it in report method.		

- Esmpro-Expsrv package

Function	Process	Source of Alert
Note		
Express Report Service	None	None
This package add report measures of Express Report Service to Report Service (ESMamvmain).		

Installation and Upgrade

This chapter describes installation of NEC ESMPRO ServerAgentService.

1. Before installation

This section describes how to set before installing NEC ESMPRO ServerAgentService.

2. Installation and Upgrade

This section describes how to install and Upgrade NEC ESMPRO ServerAgentService.

3. After installation

This section describes how to set after installing NEC ESMPRO ServerAgentService.

It is not necessary to set it when you upgrade NEC ESMPRO ServerAgentService.

***1.* Before installation**

Read by all means before beginning installation of NEC ESMPRO ServerAgentService.
Log in to the system as the root user when you set this chapter.

Important NEC ESMPRO ServerAgentService supported locale is "UTF-8" only.

Important When using NEC ESMPRO ServerAgentService service mode in iLO model, invalidate "Thermal Shutdown" on BIOS/Platform Configuration (RBSU). After a report, NEC ESMPRO ServerAgentService shutdown the server. When using NEC ESMPRO ServerAgentService Non-Service mode or uninstalling NEC ESMPRO ServerAgentService in iLO model, validate "Thermal Shutdown".

Important Do not change the setting of Encryption when using iLO model. When Production is not set, express report of a hardware fault is not performed.

***1.1* Pattern of installation**

There are the following methods to start the use of NEC ESMPRO ServerAgentService.

Install NEC ESMPRO ServerAgentService individually.

After having installed the Linux OS using "the setup with the installer of the OS standard", install NEC ESMPRO ServerAgentService individually. Depending on storage of NEC ESMPRO ServerAgentService, install it according to the following procedures.

- When you install NEC ESMPRO ServerAgentService stored away by "Starter Pack" or "EXPRESSBUILDER" or "Utility Disk" or "ZIP file", install it with reference to this chapter.

1.2 Setting before the installation

The setting before the installation is as follows.

Tips

In case of iLO support model, the following OS automatically configures the iLO inbox driver. The installation of the iLO driver is unnecessary.

- Red Hat Enterprise Linux 9
- Red Hat Enterprise Linux 8

1.2.1 Check for necessary packages

The following packages are needed to use NEC ESMPRO ServerAgentService.

Install a package of the architecture same as environment installing NEC ESMPRO ServerAgentService.

The package name is named by the next rule.

```
<package name>-<version>-<release>.<arch>.rpm
```

<Usage>

Execute check for necessary packages tool and the installation of a package is confirmed. When the directory in which necessary packages was stocked can be prepared such as a mount does an OS installation medium, it's possible to install. Refer to chapter 4 (2.2 Check for necessary packages tool) about an indicated message.

The check_packages.sh is different in a stocked directory depending on the media used for installation.

In case of EXPRESSBUILDER : {revision}/lnx/pp/esmpro_sas/check_pkg/

In case of Starter pack : software/{revision}/lnx/pp/esmpro_sas/check_pkg/

In case of Utility Disk : tools/lnx/esmpro_sas/check_pkg/

In case of the ZIP file : check_pkg/

```
Log in to the system as the root user.
<In case of check for necessary packages>
# cd {The directory in check_packages.sh}
# sh ./check_packages.sh
<In case of install for necessary packages>
1. check_pkg/ follower is copied for /tmp follower by the following example.
# cp -ar {mount point}/../esmpro_sas/check_pkg/ /tmp
2. Move to the directory where check_packages.sh is stored.
# cd {The directory in check_packages.sh}
3. Run the following command.
# sh ./check_packages.sh -i {The directory in necessary packages}
```

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted. Therefore, it is not applicable to Check for necessary packages tool. Install sblim-cmpi-base-1.6.4-14 or later.

Tips

The necessary packages stored BaseOS/Packages and AppStream/Packages in Red Hat Enterprise Linux 9, Red Hat Enterprise Linux 8 installation medium.


```
Run the following command to the necessary packages is installed.
# sh ./check_packages.sh -i {mount point}/BaseOS/Packages 1>/dev/null
# sh ./check_packages.sh -i {mount point}/AppStream/Packages
```

When you use Express Report Service (HTTPS), install the next package.

zip	(x86_64)	libcurl	(x86_64)
-----	----------	---------	----------

Because there is dependence in a package, install it in higher group order (Grp1 -> Grp2 -> Grp3).

Important

When opensman-server was used, there is a problem that the contents of the file can be read from the remote host by whom a connection is possible in TCP port 5986. (CVE-2019-3816)

Please refer to the following knowledge for details.

<https://access.redhat.com/security/cve/cve-2019-3816>

<https://access.redhat.com/errata/RHSA-2019:0638>

When you can not handle, restrict the server which can be connected to TCP port 5986 to NEC ESMPRO Manager server and localhost using firewallld.

Please refer to this chapter (3.1.4 Setting of access control) for the port NEC ESMPRO ServerAgentService uses.

(1) iLO support model

(*1) For interdependence, you appoint package at the same time, and install it.

```
# rpm -ivh perl*.rpm
# rpm -ivh python3*.rpm
```

Red Hat Enterprise Linux 8 x86_64				
Group	Package Name			
Grp1	libpkgconf	(x86_64)		
Grp2	pcr2-utf16	(x86_64)	pkgconf-m4	(noarch)
	pcr2-utf32	(x86_64)	pkgconf-pkg-config	(x86_64)
	pkgconf	(x86_64)		
Grp3	libsepol-devel	(x86_64)	pcr2-devel	(x86_64)
	mariadb-connector-c-conf	(noarch)		
Grp4	apr	(x86_64)	perl-File-Path	(noarch) (*1)
	keyutils-libs-devel	(x86_64)	perl-interpreter	(x86_64) (*1)
	libcom_err-devel	(x86_64)	perl-IO	(x86_64) (*1)
	libkadm5	(x86_64)	perl-libs	(x86_64) (*1)
	libselinux-devel	(x86_64)	perl-macros	(x86_64) (*1)
	libverto-devel	(x86_64)	perl-parent	(noarch) (*1)

Red Hat Enterprise Linux 8 x86_64				
Group	Package Name			
	lm_sensors-libs	(x86_64)	perl-PathTools	(x86_64) (*1)
	mariadb-connector-c	(x86_64)	perl-Scalar-List-Utils	(x86_64) (*1)
	net-snmp-libs	(x86_64)	perl-Socket	(x86_64) (*1)
	openslp	(x86_64)	perl-Text-Tabs+Wrap	(noarch) (*1)
	perl-Carp	(noarch) (*1)	perl-threads	(x86_64) (*1)
	perl-constant	(noarch) (*1)	perl-threads-shared	(x86_64) (*1)
	perl-Errno	(x86_64) (*1)	perl-Unicode-Normalize	(x86_64) (*1)
	perl-Exporter	(noarch) (*1)		
	Install the following package because it is the dependence of net-snmp after Red Hat Enterprise Linux 8.4.			
	perl-Encode	(x86_64) (*1)	perl-Pod-Simple	(noarch) (*1)
	perl-File-Temp	(noarch) (*1)	perl-Pod-Usage	(noarch) (*1)
	perl-Getopt-Long	(noarch) (*1)	perl-Storable	(x86_64) (*1)
	perl-HTTP-Tiny	(noarch) (*1)	perl-Term-ANSIColor	(noarch) (*1)
	perl-MIME-Base64	(x86_64) (*1)	perl-Term-Cap	(noarch) (*1)
	perl-podlators	(noarch) (*1)	perl-Time-Local	(noarch) (*1)
	perl-Pod-Escapes	(noarch) (*1)	perl-Text-ParseWords	(noarch) (*1)
	perl-Pod-Perldoc	(noarch) (*1)		
Grp5	apr-util	(x86_64)	ruby-libs-2.5	(x86_64)
	krb5-devel	(x86_64)	sblim-indication_helper	(x86_64)
	libwsman1	(x86_64)	sblim-sfcc	(x86_64)
	net-snmp-agent-libs	(x86_64)	tog-pegasus-libs	(x86_64)
	perl-Data-Dumper	(x86_64)	zlib-devel	(x86_64)
Grp6	cim-schema	(noarch)	python3-pip	(noarch)
	httpd-tools	(x86_64)	python3-pysocks	(noarch)
	net-snmp	(x86_64)	python3-setuptools	(noarch)
	net-tools	(x86_64)	python3-urllib3	(noarch)
	openssl-devel	(x86_64)	rpcbind	(x86_64)
	openwsman-client	(x86_64)	sblim-wbemcli	(x86_64)
	openwsman-server	(x86_64)	tar	(x86_64)
	python36	(x86_64)	tog-pegasus	(x86_64)
	python3-jsonpatch	(noarch)	unzip	(x86_64)
	python3-jsonpointer	(noarch)	wsmancli	(x86_64)
Grp7	sblim-cmpi-base	(x86_64)		

Important

The kernel-4.18.0-305.17.1 (or earlier) and kernel-4.18.0-305.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.4 installation medium does not have a serial port.
If you use dial-up reporting with Express Reporting Service, update to kernel-4.18.0-305.19.1 (or later).

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted.

Therefore, it is not applicable to Check for necessary packages tool.
Install sblim-cmpi-base-1.6.4-14 or later.

When you use Express Report Service (HTTPS), install the next package.

	zip	(x86_64)	libcurl	(x86_64)
--	-----	----------	---------	----------

Red Hat Enterprise Linux 9 x86_64				
Group	PackageName			
Grp1	libpkgconf	x86_64	mariadb-connector-c-config	noarch
Grp2	apr	x86_64	perl-Pod-Simple	noarch (*1)
	checkpolicy	x86_64	perl-Pod-Usage	noarch (*1)
	lm_sensors-libs	x86_64	perl-Scalar-List-Utils	x86_64 (*1)
	mariadb-connector-c	x86_64	perl-SelectSaver	noarch (*1)
	net-snmp-libs	x86_64	perl-Socket	x86_64 (*1)
	openslp	x86_64	perl-Storable	x86_64 (*1)
	perl-B	x86_64 (*1)	perl-Symbol	noarch (*1)
	perl-Carp	noarch (*1)	perl-Term-ANSIColor	noarch (*1)
	perl-Class-Struct	noarch (*1)	perl-Term-Cap	noarch (*1)
	perl-Data-Dumper	x86_64 (*1)	perl-Term-ReadLine	noarch (*1)
	perl-Encode	x86_64 (*1)	perl-Text-ParseWords	noarch (*1)
	perl-Errno	x86_64 (*1)	perl-Text-Tabs+Wrap	noarch (*1)
	perl-Exporter	noarch (*1)	perl-Time-Local	noarch (*1)
	perl-Fcntl	x86_64 (*1)	perl-constant	noarch (*1)
	perl-File-Basename	noarch (*1)	perl-if	noarch (*1)
	perl-File-Copy	noarch (*1)	perl-interpreter	x86_64 (*1)
	perl-File-Path	noarch (*1)	perl-libs	x86_64 (*1)
	perl-File-Temp	noarch (*1)	perl-mro	x86_64 (*1)
	perl-File-stat	noarch (*1)	perl-overload	noarch (*1)
	perl-Getopt-Long	noarch (*1)	perl-overloading	noarch (*1)
	perl-Getopt-Std	noarch (*1)	perl-parent	noarch (*1)
	perl-HTTP-Tiny	noarch (*1)	perl-podlators	noarch (*1)
	perl-IO	x86_64 (*1)	perl-subst	noarch (*1)
	perl-IPC-Open3	noarch (*1)	perl-vars	noarch (*1)
	perl-MIME-Base64	x86_64 (*1)	pkgconf	x86_64
	perl-POSIX	x86_64 (*1)	pkgconf-m4	noarch
	perl-PathTools	x86_64 (*1)	python3-audit	x86_64
	perl-Pod-Escapes	noarch (*1)	python3-libsemanage	x86_64
	perl-Pod-Perldoc	noarch (*1)	python3-setools	x86_64
Grp3	apr-util	x86_64 (*1)	python3-policycoreutils	noarch
	apr-util-bdb	x86_64 (*1)	ruby-libs-3.0	x86_64
	libtirpc	x86_64	sblim-indication_helper	x86_64
	libwsman1	x86_64	sblim-sfcc	x86_64
	net-snmp-agent-libs	x86_64	tog-pegasus-libs	x86_64

Red Hat Enterprise Linux 9 x86_64				
Group	PackageName			
	pkgconf-pkg-config	x86_64		
Grp4	cim-schema	noarch	python3-pip	noarch
	httpd-tools	x86_64	python3-ply	noarch
	net-snmp	x86_64	rpcbind	x86_64
	net-tools	x86_64	sblim-wbemcli	x86_64
	openssl-devel	x86_64	tar	x86_64
	openwsman-server	x86_64	tog-pegasus	x86_64
	polycoreutils-python-utils	noarch	unzip	x86_64
	python3-jsonpatch	noarch	wsmancli	x86_64
	python3-jsonpointer	noarch		
Grp5	sblim-cmpi-base	x86_64		

When you use Express Report Service (HTTPS), install the next package.

	zip	(x86_64)	libcurl	(x86_64)
--	-----	----------	---------	----------

(2) BMC support model.

(*1) For interdependence, you appoint package at the same time, and install it.

rpm -ivh perl*.rpm
rpm -ivh apr*.rpm

Red Hat Enterprise Linux 8 x86_64				
Group	PackageName			
Grp1	libpkgconf	(x86_64)		
Grp2	pcr2-utf16	(x86_64)	pkgconf-m4	(noarch)
	pcr2-utf32	(x86_64)	pkgconf-pkg-config	(x86_64)
	pkgconf	(x86_64)		
Grp3	libsepol-devel	(x86_64)	pcr2-devel	(x86_64)
	mariadb-connector-c-config	(noarch)		
Grp4	apr	(x86_64)	perl-File-Path	(noarch) (*1)
	keyutils-libs-devel	(x86_64)	perl-interpreter	(x86_64) (*1)
	libcom_err-devel	(x86_64)	perl-IO	(x86_64) (*1)
	libkadm5	(x86_64)	perl-libs	(x86_64) (*1)
	libselenium-devel	(x86_64)	perl-macros	(x86_64) (*1)
	libverto-devel	(x86_64)	perl-parent	(noarch) (*1)
	lm_sensors-libs	(x86_64)	perl-PathTools	(x86_64) (*1)
	mariadb-connector-c	(x86_64)	perl-Scalar-List-Utils	(x86_64) (*1)
	net-snmp-libs	(x86_64)	perl-Socket	(x86_64) (*1)
	openslp	(x86_64)	perl-Text-Tabs+Wrap	(noarch) (*1)
	perl-Carp	(noarch) (*1)	perl-threads	(x86_64) (*1)
	perl-constant	(noarch) (*1)	perl-threads-shared	(x86_64) (*1)
	perl-Errno	(x86_64) (*1)	perl-Unicode-Normalize	(x86_64) (*1)

Red Hat Enterprise Linux 8 x86_64				
Group	PackageName			
	perl-Exporter	(noarch) (*1)		
	Install the following package because it is the dependence of net-snmp after Red Hat Enterprise Linux 8.4.			
	perl-Encode	(x86_64) (*1)	perl-Pod-Simple	(noarch) (*1)
	perl-File-Temp	(noarch) (*1)	perl-Pod-Usage	(noarch) (*1)
	perl-Getopt-Long	(noarch) (*1)	perl-Storable	(x86_64) (*1)
	perl-HTTP-Tiny	(noarch) (*1)	perl-Term-ANSIColor	(noarch) (*1)
	perl-MIME-Base64	(x86_64) (*1)	perl-Term-Cap	(noarch) (*1)
	perl-podlators	(noarch) (*1)	perl-Time-Local	(noarch) (*1)
	perl-Pod-Escapes	(noarch) (*1)	perl-Text-ParseWords	(noarch) (*1)
	perl-Pod-Perldoc	(noarch) (*1)		
Grp5	apr-util	(x86_64)	ruby-libs-2.5	(x86_64)
	krb5-devel	(x86_64)	sblim-indication_helper	(x86_64)
	libwsman1	(x86_64)	sblim-sfcc	(x86_64)
	net-snmp-agent-libs	(x86_64)	tog-pegasus-libs	(x86_64)
	OpenIPMI-libs	(x86_64)	zlib-devel	(x86_64)
	perl-Data-Dumper	(x86_64)		
Grp6	cim-schema	(noarch)	openwsman-server	(x86_64)
	httpd-tools	(x86_64)	rpcbind	(x86_64)
	net-snmp	(x86_64)	sblim-wbemcli	(x86_64)
	net-tools	(x86_64)	tar	(x86_64)
	OpenIPMI	(x86_64)	tog-pegasus	(x86_64)
	openssl-devel	(x86_64)	unzip	(x86_64)
	openwsman-client	(x86_64)	wsmancli	(x86_64)
Grp7	sblim-cmpi-base	(x86_64)		

Important

The kernel-4.18.0-305.17.1 (or earlier) and kernel-4.18.0-305.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.4 installation medium does not have a serial port.
If you use dial-up reporting with Express Reporting Service, update to kernel-4.18.0-305.19.1 (or later).

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted. Therefore, it is not applicable to Check for necessary packages tool.
Install sblim-cmpi-base-1.6.4-14 or later.

When you use Express Report Service (HTTPS), install the next package.

	zip	(x86_64)	libcurl	(x86_64)
--	-----	----------	---------	----------

1.2.2 Setting of SELinux

If setting of SELinux is as follows.

Tips

When you use other than "Disabled", warning or error of the security violation occurs by software and may not work normally. You understand security context of SELinux enough, and please change setting.

1. Log in to the system as the root user.
2. Run the following command to confirm current setting of SELinux.
 - In case of disabled, displayed as follows.

```
# getenforce
Disabled
```

- In case of enable, displayed as follows.

```
# getenforce
Enforcing
```

- In case of displayed to warning, displayed as follows.

```
# getenforce
Permissive
```

3. It open /etc/sysconfig/selinux by an editor and look for the following lines.

```
SELINUX=<current setting>
```

4. It edit the line mentioned above and save a file.
 - In case of disabled, edit as follows.

```
SELINUX=disabled
```

Tips

Refer to the following website when setting SELinux to "Disabled" in Red Hat Enterprise Linux 9.

<https://access.redhat.com/solutions/6741621>

- In case of enforcing, edit as follows.

```
SELINUX=enforcing
```

- In case of permissive, edit as follows.

```
SELINUX=permissive
```

5. If enforcing, run the following command.

```
# semanage permissive -a pegasus_t
```

Tips

When the semanage command is not found, install the policycoreutils-python-utils package.

Tips

When the audit package is installed, It executes the following command and displays actions SELinux denies.

```
# ausearch -m AVC,USER_AVC,SELINUX_ERR,USER_SELINUX_ERR -ts today
```

When the setroubleshoot-server package is installed, it executes the following command, and it is possible to confirm it from syslog.

```
# grep "SELinux is preventing" /var/log/messages
```

6. Run the following command to restart the OS.

```
# systemctl reboot
```

2. Installation and Upgrade

It explains a procedure to install and Upgrade NEC ESMPRO ServerAgentService.

Important

The kernel-4.18.0-305.17.1 (or earlier) and kernel-4.18.0-305.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.4 installation medium does not have a serial port.

If you use dial-up reporting with Express Reporting Service, update to kernel-4.18.0-305.19.1 (or later).

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted. Therefore, it is not applicable to Check for necessary packages tool.

Install sblim-cmpi-base-1.6.4-14 or later.

Note

The mode change of Service Mode and Non-Service Mode is not possible by the upgrading of NEC ESMPRO ServerAgentService. When you change a mode, please install NEC ESMPRO ServerAgentService again.

Note

Service is stopped by an upgrade of NEC ESMPRO ServerAgentService. When introducing a process monitoring product, handle so as not to measure during an upgrade.

Note

When Federal Information Processing Standard (FIPS) mode is enabled, it installs NEC ESMPRO ServerAgentService in the following procedure.

1) Check the verify level of the rpm package.

```
# rpm --eval "%{pkgverify_level}"  
all / signature / digest
```

2) Set the verify level of the rpm package to none.

- If /etc/rpm/macros.verify does not exist, do the following:

```
# echo "%pkgverify_level none" > /etc/rpm/macros.verify  
# cat /etc/rpm/macros.verify  
%pkgverify_level none
```

- If /etc/rpm/macros.verify exists, add the following lines in a text editor such as vi:

```
%pkgverify_level none
```

3) Check the verify level of the rpm package.

```
# rpm --eval "%{pkgverify_level}"  
none
```

4) Install NEC ESMPRO ServerAgentService.

5) Return the verification level of the rpm package that you changed in step 2).

- If /etc/rpm/macros.verify did not exist in step 2), delete the created file.

```
# rm /etc/rpm/macros.verify
rm: remove regular file '/etc/rpm/macros.verify'? y
```

- If /etc/rpm/macros.verify existed in step 2), delete the following lines in a text editor such as vi:

```
% pkgverify level none
```

6) Check that the verify level of the rpm package is the same as in step 1).

```
# rpm --eval "%{_pkgverify_level}"
all / signature / digest
```

Tips

The following messages is displayed when execute pp_install on the OS does not support.

```
This kernel is not supported.
```

NEC ESMPRO ServerAgentService of a newest version is available from the following Web site.

<http://www.58support.nec.co.jp/global/download/index.html>

Select a using model.

Tips

The following message is displayed when you run an installation script of NEC ESMPRO ServerAgentService by the OS that does not install unzip package. Install unzip package then.

```
There is no unzip command.
```

Tips

The following messages is displayed when you run an installation script of NEC ESMPRO ServerAgentService by necessary packages is not installed.

```
Necessary packages are not installed. Install a package of [ NG ].
```

Refer to chapter 2 (1.2.1 Check for necessary packages) and install necessary package.

Tips

The following any one of messages is displayed when you run an installation script of NEC ESMPRO ServerAgentService by a locale of a console is besides UTF-8.

```
- There is no ZIP file.
```

```
- Python Module Install Begin.
```

```
ERROR:install <Python Module Name> failed.
```

```
ERROR: install python module failed! So stop to install, exit.
```

Change the locale to UTF-8 and install.

Tips

The following messages is displayed when you run an installation script of NEC ESMPro ServerAgentService by Federal Information Processing Standard (FIPS) mode is enabled.

Example..

```
# sh ./pp_install
Python Module Install Begin.
Python Module Install End successfully.

ESMPro ESMRest Package Install Begin.
Verifying... ##### [100%]
Preparing... ##### [100%]
ERROR: Command [/bin/rpm -ivh
/tmp/EXPRESSBUILDER7_00000000_000000000000000000/x86_64/esmrest-
1.0.0-0.x86_64.rpm] failed! So stop to install, exit.
<< Processing does not proceed after this >>
```

Kill the installation process to press <Ctrl> + <C> key, and follow the steps in "When Federal Information Processing Standard (FIPS) mode is enabled" in [Note] above.

Tips

The following messages is displayed when you run an installation script of NEC ESMPro ServerAgentService by tog-pegasus is not started.

```
Error: tog-pegasus(cimserver) is not running.
```

When the following file exists, it deletes.

```
# rm -f /var/lib/Pegasus/repository/root#interop/instances/CIM I
ndicationSubscription.instances.rollback
```

Start the tog-pegasus.

```
# systemctl start tog-pegasus.service
```

2.1 Starter Pack

When you install NEC ESMPro ServerAgentService stored away by Starter Pack, refer to the following procedures.

1. Log in to the system as the root user.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount
/dev/sda2 on / type ext4 (rw)
... omission ....
/dev/sr0 on /media/disk type iso9660
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).

Universal Disk Format (udf) is file system of the optical disc media.

2. Insert Starter Pack the optical disk drive.
3. Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

4. Run the following command to mount Starter Pack.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

5. Move to the directory where NEC ESMPro ServerAgentService is stored.

```
# cd /media/cdrom/software/{revision}/lnx/pp/esmpro_sas/
```

{revision} varies according to Starter Pack version.

In case of Starter Pack Version S8.10-001.xx, {revision} is 001.

But, in case of 003 or 004, it will be the following directory.

001 : NEC Express5800/R120h-1M, R120h-2M

002 : NEC Express5800/R120h-1E, R120h-2E, T120h

6. Run the following command to install NEC ESMPro ServerAgentService.

```
# sh ./pp_install -l en_US.UTF-8
```

Note

The mode change of Service Mode and Non-Service Mode is not possible by the upgrading of NEC ESMPRO ServerAgentService. When you change a mode, please install NEC ESMPRO ServerAgentService again.

Tips

Refer to chapter 4 (1.1 Setting before the installation) for setting before the installation of NEC ESMPRO ServerAgentService.

Argument of the pp_install	explanation
none (Service Mode)	All packages (Esmpro-Provider, Esmpro-strgfs-Provider, Esmpro-Cmnsrv, Esmpro-Selsrv, Esmpro-Expsrv) are installed. The process to be resident as service is installed.
-p OFF (Non-Service Mode)	Provider packages (Esmpro-Provider, Esmpro-strgfs-Provider) are installed. The process to be resident as service is not installed.

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv
```

It is Service Mode when Esmpro-Cmnsrv package was displayed.

```
Esmpro-Cmnsrv-"Version Information"
```

7. Run the following command to eject Starter Pack from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take Starter Pack out of optical disk drive by manual operation.

8. Run the following command to restart the OS.

```
# systemctl reboot
```

With the above installation of NEC ESMPRO ServerAgentService is completion.

2.2 EXPRESSBUILDER

When you install NEC ESMPRO ServerAgentService stored away by EXPRESSBUILDER, refer to the following procedures.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount
/dev/sda2 on / type ext4 (rw)
... omission ....
/dev/sr0 on /media/disk type iso9660
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).

Universal Disk Format (udf) is file system of the optical disc media.

1. Log in to the system as the root user.
2. Insert EXPRESSBUILDER the optical disk drive.
3. Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

4. Run the following command to mount EXPRESSBUILDER.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

5. Move to the directory where NEC ESMPRO ServerAgentService is stored.

```
# cd /media/cdrom/{revision}/lnx/pp/esmpro_sas/
```

{revision} varies according to EXPRESSBUILDER version.

In case of EXPRESSBUILDER Version 7.10-011.01, {revision} is 011.

6. Run the following command to install NEC ESMPRO ServerAgentService.

```
# sh ./pp_install -l en_US.UTF-8
```

Note

The mode change of Service Mode and Non-Service Mode is not possible by the upgrading of NEC ESMPRO ServerAgentService. When you change a mode, please install NEC ESMPRO ServerAgentService again.

Tips

Refer to chapter 4 (1.1 Setting before the installation) for setting before the installation of NEC ESMPRO ServerAgentService.

Argument of the pp_install	explanation
none (Service Mode)	All packages (Esmpro-Provider, Esmpro-strgfs-Provider, Esmpro-Cmnsrv, Esmpro-Selsrv, Esmpro-Expsrv) are installed. The process to be resident as service is installed.
-p OFF (Non-Service Mode)	Provider packages (Esmpro-Provider, Esmpro-strgfs-Provider) are installed. The process to be resident as service is not installed.

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv
```

It is Service Mode when Esmpro-Cmnsrv package was displayed.

```
Esmpro-Cmnsrv-"Version Information"
```

7. Run the following command to eject EXPRESSBUILDER from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take EXPRESSBUILDER out of optical disk drive by manual operation.

8. Run the following command to restart the OS.

```
# systemctl reboot
```

With the above installation of NEC ESMPRO ServerAgentService is completion.

2.3 Utility Disk

When you install NEC ESMPRO ServerAgentService stored away by Utility Disk, refer to the following procedures.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount
/dev/sda2 on / type ext4 (rw)
... omission ....
/dev/sr0 on /media/disk type iso9660
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).

Universal Disk Format (udf) is file system of the optical disc media.

1. Log in to the system as the root user.
2. Insert Utility Disk the optical disk drive.
3. Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

4. Run the following command to mount Utility Disk.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

5. Move to the directory where NEC ESMPRO ServerAgentService is stored.

```
# cd /media/cdrom/tools/lxx/esmpro_sas/
```

6. Run the following command to install NEC ESMPRO ServerAgentService.

```
# sh ./pp_install -l en_US.UTF-8
```

Note

The mode change of Service Mode and Non-Service Mode is not possible by the upgrading of NEC ESMPRO ServerAgentService. When you change a mode, please install NEC ESMPRO ServerAgentService again.

Tips

Refer to chapter 4 (1.1 Setting before the installation) for setting before the installation of NEC ESMPRO ServerAgentService.

Argument of the pp_install	explanation
none (Service Mode)	All packages (Esmpro-Provider, Esmpro-strgfs-Provider, Esmpro-Cmnsrv, Esmpro-Selsrv, Esmpro-Expsrv) are installed. The process to be resident as service is installed.
-p OFF (Non-Service Mode)	Provider packages (Esmpro-Provider, Esmpro-strgfs-Provider) are installed. The process to be resident as service is not installed.

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv
```

It is Service Mode when Esmpro-Cmnsrv package was displayed.

```
Esmpro-Cmnsrv-"Version Information"
```

7. Run the following command to eject Utility Disk from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take Utility Disk out of optical disk drive by manual operation.

8. Run the following command to restart the OS.

```
# systemctl reboot
```

With the above installation of NEC ESMPRO ServerAgentService is completion.

2.4 ZIP file

When you install NEC ESMPRO ServerAgentService stored away by ZIP file, refer to the following procedures.

1. Log in to the system as the root user.
2. Uncompress the ZIP file (lnx_esmsas-{Version}.x86_64.zip) in a directory of your choice.

Tips

Unzip while keeping directory composition.

```
pp_install
x86_64/Esmpro-Cmnsrv-{version}.x86_64.rpm
x86_64/Esmpro-Expsrv-{version}.x86_64.rpm
x86_64/Esmpro-Provider-{version}.x86_64.rpm
x86_64/Esmpro-Selsrv-{version}.x86_64.rpm
x86_64/Esmpro-strgfs-Provider-{version}.x86_64.rpm
```

The following messages are displayed when directory composition does not right.

```
This kernel is not supported.
```

3. Move to the directory where installation script of NEC ESMPRO ServerAgentService is stored.

```
# cd {directory of your choice}
```

4. Run the following command to install NEC ESMPRO ServerAgentService.

```
# sh ./pp_install -l en_US.UTF-8
```

Note

The mode change of Service Mode and Non-Service Mode is not possible by the upgrading of NEC ESMPRO ServerAgentService. When you change a mode, please install NEC ESMPRO ServerAgentService again.

Tips

Refer to chapter 4 (1.1 Setting before the installation) for setting before the installation of NEC ESMPRO ServerAgentService.

Argument of the pp_install	explanation
none (Service Mode)	All packages (Esmpro-Provider, Esmpro-strgfs-Provider, Esmpro-Cmnsrv, Esmpro-Selsrv, Esmpro-Expsrv) are installed. The process to be resident as service is installed.
-p OFF (Non-Service Mode)	Provider packages (Esmpro-Provider, Esmpro-strgfs-Provider) are installed. The process to be resident as service is not installed.

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv  
It is Service Mode when Esmpro-Cmnsrv package was displayed.  
Esmpro-Cmnsrv-"Version Information"
```

5. Run the following command to restart the OS.

```
# systemctl reboot
```

With the above installation of NEC ESMPRO ServerAgentService is completion.

3. After installation

After having finished installation of NEC ESMPRO ServerAgentService, read by all means.

Log in to the system as the root user when you set this chapter.

It is not necessary to set it when you upgrade NEC ESMPRO ServerAgentService, but confirm the connection with NEC ESMPRO Manager.

Important

The kernel-4.18.0-305.17.1 (or earlier) and kernel-4.18.0-305.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.4 installation medium does not have a serial port. If you use dial-up reporting with Express Reporting Service, update to kernel-4.18.0-305.19.1 (or later).

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted. Therefore, it is not applicable to Check for necessary packages tool. Install sblim-cmpi-base-1.6.4-14 or later.

Note

When tog-pegasus starts, run /usr/share/Pegasus/scripts/generate-certs, and if the certificate and trust store locations have not been created, output the following message to syslog to update the certificate file (*).

```
generate-certs: Generating RSA private key, 2048 bit long modulus
generate-certs: unable to write 'random state'
generate-certs: e is 65537 (0x10001)
generate-certs: Generating RSA private key, 2048 bit long modulus
generate-certs: unable to write 'random state'
generate-certs: e is 65537 (0x10001)
generate-certs: Signature ok
generate-certs:  subject=/C=UK/ST=Berkshire/L=Reading/O=The Open
Group/OU=The OpenPegasus Project/CN=test-host
generate-certs: Getting CA Private Key
generate-certs: unable to write 'random state'
```

```
* /etc/pki/ca-trust/source/anchors/localhost-pegasus.pem
   /etc/pki/ca-trust/extracted/openssl/ca-bundle.trust.crt
   /etc/pki/ca-trust/extracted/pem/tls-ca-bundle.pem
   /etc/pki/ca-trust/extracted/pem/email-ca-bundle.pem
   /etc/pki/ca-trust/extracted/pem/objsign-ca-bundle.pem
   /etc/pki/ca-trust/extracted/java/cacerts
```

The first time tog-pegasus is started, the certificate-related files are always updated because the certificate and trust store locations have not been created.

If the certificate file was updated before the message was output (tog-pegasus starts for the first time), the contents may be overwritten (erased).

NEC ESMPRO ServerAgentService installation script starts tog-pegasus, because registers ESMPRO provider, if tog-pegasus is not started.

After starting tog-pegasus for the first time, update the certificate file again.

Note

Confirm the connection with NEC ESMPRO Manager is as follows.

1. Login to NEC ESMPRO Manager.
2. Click the component name which this server, and click the "Setting" tab.
3. Click <Check Connection> button, and check connection.

Note

[Action After Report] is disable shutdown at [Temp Lower Error(EventID:C0000066, C0000070)] events, when BMC support model.

If you want enable shutdown at [Temp Lower Error(EventID:C0000066, C0000070)], please refer to chapter 4(1.1.15 [Action After Report] is disable shutdown at [Temp Lower Error] events for BMC support model).

Tips

openwsmand is calling pam_pwcheck.so by a definition of a PAM setting file (/etc/pam.d/openwsman).

```
#%PAM-1.0
auth      required pam_unix.so      nullok
auth      required pam_nologin.so
account   required pam_unix.so
*password required pam_pwcheck.so  nullok
password  required pam_unix.so      nullok use_first_pass use_authtok
session   required pam_unix.so      none
```

However, when pam_pwcheck.so does not exist, communication with NEC ESMPRO Manager is the timing which occurred, and the following log is recorded in /var/log/secure.

```
openwsmand: PAM unable to
dlopen(/usr/lib64/security/pam_pwcheck.so):
/usr/lib64/security/pam_pwcheck.so: cannot open shared object
file: No such file or directory
openwsmand: PAM adding faulty module:
/usr/lib64/security/pam_pwcheck.so
```

When not using pwcheck.so, delete pwcheck.so from a PAM setting file.

Execute OS restart or the following command to make setting reflected.

```
# service openwsmand restart
# /opt/nec/esmpro_sa/bin/ESMRestart
```

3.1 Setting after the installation

The setting after the installation is as follows.

3.1.1 Workaround of openwsmand

The phenomenon that memory consumption of openwsmand increased is confirmed by our test. NEC ESMPRO ServerAgentService provides esmsas_openwsman_weekly script rebooting openwsmand as workaround once a week and restrain a memory consumption amount used for openwsmand.

Tips

The systemd is used to store the following unit files:

```
/usr/lib/systemd/system/esmsas_openwsman_weekly.service
```

```
/usr/lib/systemd/system/esmsas_openwsman_weekly.timer  
Enable and start the timer unit with the following command.  
# /usr/bin/systemctl enable esmsas_openwsman_weekly.timer  
# /usr/bin/systemctl start esmsas_openwsman_weekly.timer
```

1. Log in to the system as the root user.
2. Depending on storage of NEC ESMPRO ServerAgentService, install it according to the following procedures.

- When you install esmsas_openwsman_weekly script stored away by Starter Pack, refer to the following procedures.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount  
/dev/sda2 on / type ext4 (rw)  
... omission ....  
/dev/sr0 on /media/disk type iso9660  
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).

Universal Disk Format (udf) is file system of the optical disc media.

- 1) Insert Starter Pack the optical disk drive.
- 2) Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

- 3) Run the following command to mount Starter Pack.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

- 4) Copy esmsas_openwsman_weekly.tgz in a directory of your choice from Starter Pack. In the following procedures, make /tmp/esmsas directory and copy it.

```
# mkdir /tmp/esmsas  
# cd /media/cdrom/software/{revision}/lnx/pp/esmpo_sas/scripts/  
# cp esmsas_openwsman_weekly.tgz /tmp/esmsas
```

{revision} varies according to model.

001 : NEC Express5800/R120h-1M, R120h-2M

- 5) After having moved to any directory, uncompress esmsas_openwsman_weekly.tgz and install esmsas_openwsman_weekly script.

```
# cd /tmp/esmsas
# tar xzvf esmsas_openwsman_weekly.tgz
# sh ./esmsas_openwsman_weekly.sh -i
```

- 6) After having installed esmsas_openwsman_weekly script, move to a directory in one rank higher and delete the files which uncompress esmsas_openwsman_weekly.tgz.

```
# cd /
# rm -rf /tmp/esmsas
```

- 7) Run the following command to eject Starter Pack from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take Starter Pack out of optical disk drive by manual operation.

- When you install esmsas_openwsman_weekly script stored away by EXPRESSBUILDER, refer to the following procedures.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount
/dev/sda2 on / type ext4 (rw)
... omission ....
/dev/sr0 on /media/disk type iso9660
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).

Universal Disk Format (udf) is file system of the optical disc media.

- 1) Insert EXPRESSBUILDER the optical disk drive.
- 2) Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

- 3) Run the following command to mount EXPRESSBUILDER.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

- 4) Copy esmsas_openwsman_weekly.tgz in a directory of your choice from EXPRESSBUILDER. In the following procedures, make /tmp/esmsas directory and copy it.

```
# mkdir /tmp/esmsas  
# cd /media/cdrom/{revision}/lnx/pp/esmpro_sas/scripts/  
# cp esmsas_openwsman_weekly.tgz /tmp/esmsas
```

- 5) After having moved to any directory, uncompress esmsas_openwsman_weekly.tgz and install esmsas_openwsman_weekly script.

```
# cd /tmp/esmsas  
# tar xzvf esmsas_openwsman_weekly.tgz  
# sh ./esmsas_openwsman_weekly.sh -i
```

- 6) After having installed esmsas_openwsman_weekly script, move to a directory in one rank higher and delete the files which uncompress esmsas_openwsman_weekly.tgz.

```
# cd /  
# rm -rf /tmp/esmsas
```

- 7) Run the following command to eject EXPRESSBUILDER from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take EXPRESSBUILDER out of optical disk drive by manual operation.

- When you install esmsas_openwsman_weekly script stored away by Utility Disk, refer to the following procedures.

Tips

The following procedures explain "/dev/sr0", mounting as "/media/cdrom" in an origin of mount of the Laser Disk drive. When mounting is different, it read it for the following procedures appropriately, and work. In addition, optical disk drive may be mounted automatically by environment. In that case, it do not need the mount.

When you do not know a mount point, you can confirm it from the result of the mount command.

```
# mount  
/dev/sda2 on / type ext4 (rw)  
... omission ....  
/dev/sr0 on /media/disk type iso9660  
(ro,nosuid,nodev,uhelper=udisks,uid=0,gid=0...
```

The type becomes the DVD which a device (/dev/sr0) of iso9660 was mounted behind, and the mount point is "/media/disk". The type may become udf.

iso9660 is file system of the optical disc media (CD or DVD).
Universal Disk Format (udf) is file system of the optical disc media.

8) Insert Utility Disk the optical disk drive.

9) Run the following command to make the directory of mount point.

```
# mkdir /media/cdrom
```

10) Run the following command to mount Utility Disk.

```
# mount -r -t iso9660 /dev/sr0 /media/cdrom
```

11) Copy esmsas_openwsman_weekly.tgz in a directory of your choice from Utility Disk. In the following procedures, make /tmp/esmsas directory and copy it.

```
# mkdir /tmp/esmsas  
# cd /media/cdrom/tools/lrx/esmpro_sas/scripts/  
# cp esmsas_openwsman_weekly.tgz /tmp/esmsas
```

12) After having moved to any directory, uncompress esmsas_openwsman_weekly.tgz and install esmsas_openwsman_weekly script.

```
# cd /tmp/esmsas  
# tar xzvf esmsas_openwsman_weekly.tgz  
# sh ./esmsas_openwsman_weekly.sh -i
```

13) After having installed esmsas_openwsman_weekly script, move to a directory in one rank higher and delete the files which uncompress esmsas_openwsman_weekly.tgz.

```
# cd /  
# rm -rf /tmp/esmsas
```

14) Run the following command to eject Utility Disk from optical disk drive.

```
# cd / ; eject /media/cdrom
```

When you cannot use eject command, it unmount, and, take Utility Disk out of optical disk drive by manual operation.

➤ When you install esmsas_openwsman_weekly script stored away by ZIP file, refer to the following procedures.

1) Uncompress the file which you downloaded in a directory of your choice. In the following procedures, make /tmp/esmsas directory and copy it.

```
# mkdir /tmp/esmsas
```

2) Move to the directory, uncompress esmsas_openwsman_weekly.tgz and install esmsas_openwsman_weekly script.


```
# cd /tmp/esmsas/scripts/
# tar xzvf esmsas_openwsman_weekly.tgz
# sh ./esmsas_openwsman_weekly.sh -i
```

- 3) Run the following command to delete directory which uncompress esmsas_openwsman_weekly.tgz.

```
# cd /
# rm -rf /tmp/esmsas
```

With the above installation of esmsas_openwsman_weekly script is completion.

Tips

The methods to uninstall only esmsas_openwsman_weekly script are as follows.

```
# cd /opt/nec/esmpo_sa/tools/
# sh ./esmsas_openwsman_weekly.sh -e
```

3.1.2 Setting of access control

NEC ESMPro Manager and ServerAgentService (SAS) use the following ports. If access control is placed between Manager and SAS, or if access control is enabled on your system, open the following ports. Refer to the following files for the port range.

```
# cat /proc/sys/net/ipv4/ip_local_port_range
```

The open examples of the port using firewalld are refer to the following website.

Product Documentation for Red Hat Enterprise Linux

https://access.redhat.com/documentation/en-us/red_hat_enterprise_linux/

Red Hat Enterprise Linux 9

+ - Configuring firewalls and packet filters

+ - 1. Using and configuring firewalld

Red Hat Enterprise Linux 8

+ - Securing networks

+ - 9. Using and configuring firewalld

- Between SAS and Manager

Function	SAS	Direction	Manager	Note
Server Monitoring (WS-Man)	5986/tcp	← →	Auto-assignment	openwsmand (HTTPS)
CIM Indication Setting	-	← →	ICMP	ping(ICMP) Connection confirm.
CIM Indication Subscription	5989/tcp	← →	Auto-assignment	tog-pegasus (HTTPS)
CIM Indication Sending events	Auto-assignment	→ ←	6736/tcp	tog-pegasus (HTTPS)
Report to Manager (SNMP)	Auto-assignment	→	162/udp	SNMP Trap

Function	SAS	Direction	Manager	Note
Report to Manager (TCP/IP in Band, TCP/IP Out-of-Band)	Auto-assignment	→ ←	31134/tcp	
Express Report Service (Via Forward Manager)	Auto-assignment	→ ←	31136/tcp	
Express Report Service (HTTPS Via Forward Manager)	Auto-assignment	→ ←	31138/tcp	

- * The port number of openwsmand is set in "ssl_port" at [server] section of /etc/openwsman/openwsman.conf.
- * The port number(6736) of "CIM Indication Sending events" is a default value. It is set in "port number" at [Alert Receive Setting] - [CIM-Indication Setting] of AlertViewer in NEC ESMPro Manager.
- * The upper direction shows the direction at start-up, and the lower shows the return.
- * For the setting of the port number for Report to Manager (TCP/IP in Band, Out-of-Band) is used as a report method.

- Between SAS and Mail Server

Function	SAS	Direction	Mail Server	Note
Express Report Service (Internet Mail)	Auto-assignment	→ ←	25/tcp	SMTP
		→ ←	110/tcp	POP3

- * The upper direction shows the direction at start-up, and the lower shows the return.
- * You can change the port to use than Report Setting window.

- Between SAS and HTTPS Server

Function	SAS	Direction	HTTPS Server	Note
Express Report Service (HTTPS)	Auto-assignment	→ ←	443/tcp	HTTPS

- * The upper direction shows the direction at start-up, and the lower shows the return.
- * You can change the port to use than Report Setting window.

- Interprocess communication in the local host

Function	Port	Note
NEC ESMPro ServerAgentService	Auto-assignment	
rpcbind	111/tcp	
	111/udp	
tog-pegasus	5988/tcp	HTTP
	5989/tcp	HTTPS
openwsmand	5986/tcp	HTTPS

- * Cannot change the port number of rpcbind and tog-pegasus.
- * The port number of openwsmand is set in "ssl_port" at [server] section of

/etc/openwsman/openwsman.conf.

3.1.3 Setting of SELinux

If you set SELinux to something other than "Disabled", perform the following steps:

1. Log in to the system as the root user.
2. Run the following command to setting of SELinux Policy.

```
# ausearch -c 'cimprovagt' --raw | audit2allow -M my-cimprovagt  
# semodule -X 300 -i my-cimprovagt.pp
```

Tips

A message-output to syslog by settroubleshoot is restrained.

3.2 Settings of NEC ESMPRO Manager

Register NEC ESMPRO ServerAgentService with NEC ESMPRO Manager by "Auto Registration" or "Manual Registration" to monitoring this server (hardware).

Refer to NEC ESMPRO Manager Setup Guide for instructions.

NEC ESMPRO Manager can download the latest version from the following website:

<http://www.58support.nec.co.jp/global/download/index.html>

ESMPRO > NEC ESMPRO Manager

3.3 Setting of Manager (SNMP)

It is necessary to set report means in "Report Setting" to report it from NEC ESMPRO ServerAgentService to NEC ESMPRO Manager after having rebooted a system. Refer to NEC ESMPRO ServerAgentService Users Guide for the setting method of other report means.

Note

Because Monitoring Service is not installed in Non-Service Mode, cannot set report means.

Tips

This setting is needed for the syslog monitoring system. Also, this setting is needed for the function which cooperate with other product, so be sure to set.


1. Log in to the system as the root user.
2. Run the following command to move to the directory where ESMamsadm is stored.

```
# cd /opt/nec/esmpro_sa/bin/
```


3. Run the following command to start Control Panel (ESMamsadm). [Report Setting] screen opens.

```
# ./ESMamsadm
```


4. Select "Base Setting". [Base Setting] screen opens.

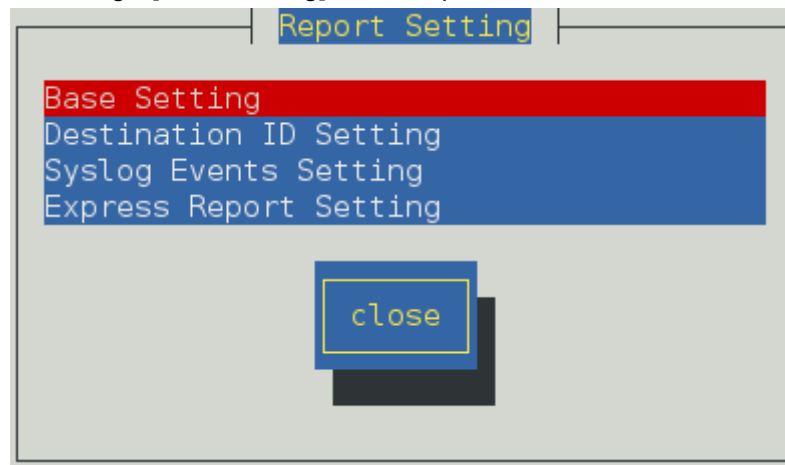

5. Select "Manager(SNMP)". [SNMP Trap Setting] screen opens.

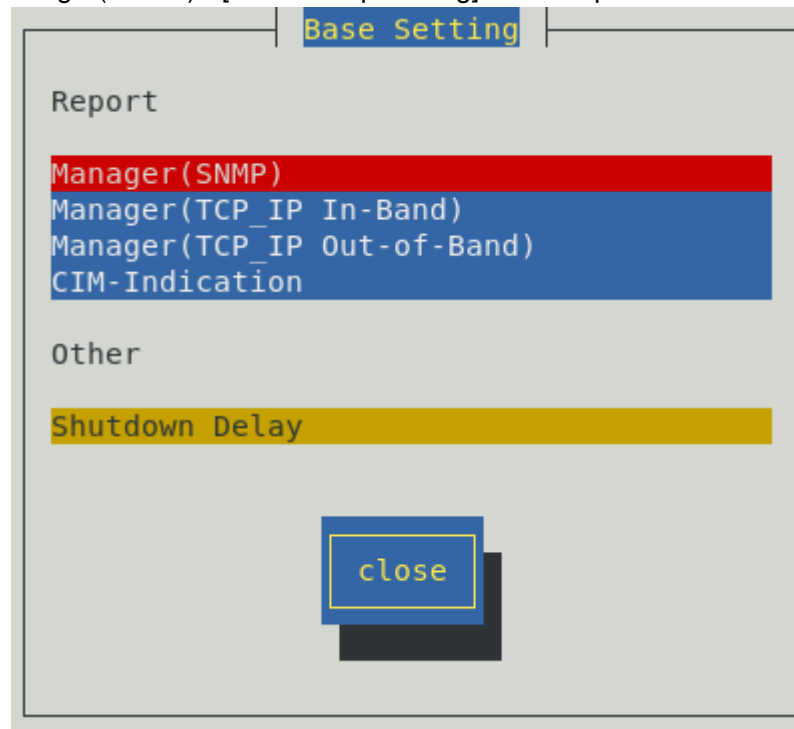

6. Select "< Add >" and add IP address of "Trap Destination IP".

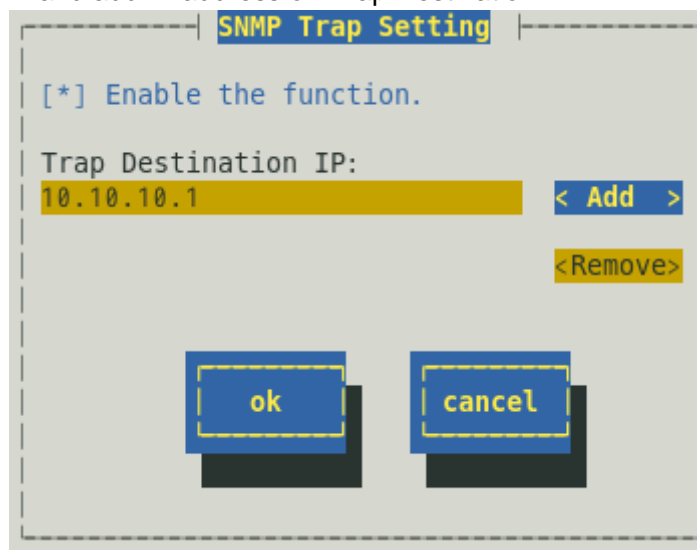

7. Select "ok", saved and [SNMP Trap Setting] screen closes.
8. Select "close", [Base Setting] screen closes.
9. Select "close", [Report Setting] screen closes.

3.4 Setting of Express Report Service

Refer to Express Report Service Setup Guide (Linux/VMware) stored away by EXPRESSBUILDER or Starter Pack, or following Web site for the setting method of the Express Report Service.

<http://www.58support.nec.co.jp/global/download/index.html>

ESMPRO > Express Report Service (Linux)

Note

Because Monitoring Service is not installed in Non-Service Mode, cannot set to the Express Report Service.

Uninstallation

This chapter describes uninstallation of NEC ESMPRO ServerAgentService.

1. Uninstallation

This section describes how to uninstall NEC ESMPRO ServerAgentService.

1. Uninstallation

It explains a procedure to uninstall NEC ESMPRO ServerAgentService.

1. Log in to the system as the root user.
2. In case of workaround of openwsmand, uninstall esmsas_openwsman_weekly script.

```
# cd /opt/nec/esmpro_sa/tools/  
# sh ./esmsas_openwsman_weekly.sh -e
```

3. Run the following command to uninst all in order of next.
You skip uninstallation of the package which is not installed.

- In case of Service Mode.

```
# rpm -e Esmpro-Selsrv  
# rpm -e Esmpro-Expsrv  
# rpm -e Esmpro-Cmnsrv  
# rpm -e Esmpro-strgfs-Provider  
# rpm -e Esmpro-Provider  
# rpm -e esmrest      (iLO support model)
```

- In case of Non-Service Mode.

```
# rpm -e Esmpro-strgfs-Provider  
# rpm -e Esmpro-Provider
```

Tips

Execute the following commands, confirm which mode NEC ESMPRO ServerAgentService is installed with.

```
# rpm -qa | grep Esmpro-Cmnsrv
```

It is Service Mode when Esmpro-Cmnsrv package was displayed.

```
Esmpro-Cmnsrv-"Version Information"
```

4. Run the following command to restart the OS.

```
# systemctl reboot
```

With the above uninstallation of NEC ESMPRO ServerAgentService is completion.

Appendix

1. The contents which an installation script sets

This section describes about the installation script of NEC ESMPRO ServerAgentService.

2. About tools

This section describes about tools.

3. LICENSE

This section describes about the license of the software which NEC ESMPRO ServerAgentService uses.

1. The contents which an installation script sets

In the installation script of NEC ESMPRO ServerAgentService, execute the following setting.

1.1 Setting before the installation

The setting before the installation is as follows.

1.1.1 Setting of sblim-sfcb

Check that enabled of sblim-sfcb.

```
# systemctl is-enabled sblim-sfcb.service
Enabled
```

- sblim-sfcb is not installed when "Failed to get unit file state for sblim-sfcb.service: No such file of directory" is displayed, do not change the setting of sblim-sfcb.

- In case of enabled, change the setting of sblim-sfcb, and stop sblim-sfcb.

```
# systemctl disable sblim-sfcb.service
rm '/etc/systemd/system/multi-user.target.wants/sblim-sfcb.service'
# systemctl stop sblim-sfcb.service
```

- In case of disabled, do not change the setting of sblim-sfcb.

1.1.2 Setting of openwsman.conf

Enable SSL access; enable (delete # of the head of a line) ssl_port in [server] of /etc/openwsman/openwsman.conf. The cim_client_frontend do not change from a default setting and assume it XML.

Before:

```
[server]
:
ipv4 = yes
ipv6 = yes

#ssl_port = 5986
:

[cim]
default_cim_namespace = root/cimv2

# set to SfcbLocal for local connection with sfcb CIMOM running on same system
# cim_client_frontend = SfcbLocal
cim_client_frontend = XML
```

After:

```
[server]
:
ipv4 = yes
ipv6 = yes

ssl_port = 5986
:

[cim]
default_cim_namespace = root/cimv2

# set to SfcblLocal for local connection with sfcbl CIMOM running on same system
# cim_client_frontend = SfcblLocal
cim_client_frontend = XML
```

1.1.3 Setting of access.conf

Permission remote and local access to Common Information Model Object Manager (CIMOM). Edit /etc/Pegasus/access.conf.

Before:

```
#####
#
# Pegasus PAM Access Rules:
# 1. The Remote host user access rule:
#   By default, ONLY the pegasus user can use remote network HTTP/S
service:
#
-: ALL EXCEPT pegasus:wbemNetwork
#
#
# 2. The Local host user access rule:
#   By default, ONLY the pegasus and root users can use pegasus local
HTTP/S service:
#
-: ALL EXCEPT pegasus root:wbemLocal
```

After:

```
#####
#
# Pegasus PAM Access Rules:
# 1. The Remote host user access rule:
#   By default, ONLY the pegasus user can use remote network HTTP/S
service:
#
+: ALL :wbemNetwork
#
```

```
#
# 2. The Local host user access rule:
#   By default, ONLY the pegasus and root users can use pegasus local
#   HTTP/S service:
#
+: ALL :wbemLocal
```

1.1.4 Setting of CIM Server

Enable HTTP connection and remote access to CIM Server.

```
# /usr/sbin/cimconfig -p -s enableHttpConnection=true
# /usr/sbin/cimconfig -p -s enableRemotePrivilegedUserAccess=true
```

1.1.5 Setting of tog-pegasus

Check that enabled of tog-pegasus.

```
# systemctl is-enabled tog-pegasus.service
enabled
```

- In case of enabled, do not change the setting of tog-pegasus. Restart the tog-pegasus.

```
# systemctl restart tog-pegasus.service
```

- In case of disabled, change the setting of tog-pegasus, and start the tog-pegasus.

```
# systemctl enable tog-pegasus.service
ln -s '/usr/lib/systemd/system/tog-pegasus.service'
'/etc/systemd/system/multi-user.target.wants/tog-pegasus.service'
# systemctl start tog-pegasus.service
```

1.1.6 Setting of snmpd

Check that enabled of snmpd.

```
# systemctl is-enabled snmpd.service
Enabled
```

- In case of enabled, do not change the setting of snmpd.

- In case of disabled, change the setting of snmpd, and start snmpd.

```
# systemctl enable snmpd.service
ln -s '/usr/lib/systemd/system/snmpd.service' '/etc/systemd/system/multi-
user.target.wants/snmpd.service'
# systemctl start snmpd.service
```

1.1.7 Setting of ipmi

BMC support model only.
Check that enabled of ipmi.

```
# systemctl is-enabled ipmi.service
Enabled
```

- In case of enabled, do not change the setting of ipmi.
- In case of disabled, change the setting of ipmi, and reboot.

```
# systemctl enable ipmi.service
ln -s '/usr/lib/systemd/system/ipmi.service' '/etc/systemd/system/multi-
user.target.wants/ipmi.service'
# systemctl reboot
```

1.1.8 Setting of NetworkManager-wait-online.service

Check that enabled of NetworkManager-wait-online.

```
# systemctl is-enabled NetworkManager-wait-online.service
enabled
```

- In case of enabled, do not change the setting of NetworkManager-wait-online.
- In case of disabled, change the setting of NetworkManager-wait-online, and start the NetworkManager-wait-online.

```
# systemctl enable NetworkManager-wait-online.service
ln -s '/usr/lib/systemd/system/ NetworkManager-wait-online.service'
'/etc/systemd/system/multi-user.target.wants/ NetworkManager-wait-
online.service'
# systemctl start NetworkManager-wait-online.service
```

1.1.9 Creating self signed certificate of openwsman

Tips

When there is a self signed certificate or a certificate signed in Certificate Authority, openwsman uses it as a certificate by appointing it in `ssl_cert_file` and `ssl_key_file` at [server] section of `/etc/openwsman/openwsman.conf`.

```
[server]
:
ssl_cert_file = /etc/openwsman/servercert.pem
ssl_key_file = /etc/openwsman/serverkey.pem
```

Note

`owsmangencert.sh` uses a random number to make a server certificate of openwsman. Execute `owsmangencert.sh`, but cancel it, and change `RANDFILE (/dev/random)` in `/etc/openwsman/ssleay.cnf` to `/dev/urandom` when it is not input "Country Name".

```
RANDFILE = /dev/urandom
```

Note

In case of Red Hat Enterprise Linux 9, Red Hat Enterprise Linux 8, check if the default_bits (key length) of ssleay.cnf is 2048. For 1024, change to 2048.

```
[ req ]
default_bits          = 2048
```

Note

When you overwrite by a new self signed certificate, add "--force" to an argument.

```
# /etc/openwsman/owsmangencert.sh --force
```

Create self signed certificate of openwsman. When a certificate is stored, it do not make making (do not overwrite).

```
# /opt/nec/esmpro_sa/tools/esmsasgencert.sh
```

Note

The expiration date of self signed certificate esmsasgencert.sh create is 365 days.

```
cat <<EOF |openssl req -days 365 $@ -config $CNFFILE \
    -new -x509 -nodes -out $CERTFILE \
    -keyout $KEYFILE
```

The expiration date can be confirmed by the following command.

```
# openssl x509 -enddate -noout -in /etc/openwsman/servercert.pem
```

In case of Red Hat Enterprise Linux 9, Red Hat Enterprise Linux 8, the default_bits (key size) in /etc/openwsman/ssleay.cnf is changed to 2048 from 1024.

```
[ req ]
default_bits          = 2048
```

When exceeding the expiration date, self signed certificate of openwsman do update and openwsmand service is restarted.

```
# /etc/openwsman/owsmangencert.sh --force
# service openwsmand restart
```

Tips

When it starts openwsmand without making a server certificate, the following messages are displayed.

```
FAILED: Starting openwsman server
There is no ssl server key available for openwsman server to use.
Please generate one with the following script and start the
openwsman service again:
```

```
#####
/etc/openwsman/owsmangencert.sh
=====
```

NOTE: The script uses /dev/random device for generating some random bits while generating the server key.

```
If this takes too long, you can replace the value of "RANDFILE"
in /etc/openwsman/ssleay.cnf with
/dev/urandom. Please understand the implications of replacing
the RANDFILE.
```

1.1.10 Setting of openwsmand

Check that enabled of openwsmand.

```
# systemctl is-enabled openwsmand.service
enabled
```

- In case of enabled, do not change the setting of openwsmand.
- In case of disabled, change the setting of openwsmand, and start openwsmand.

```
# systemctl enable openwsmand.service
ln -s '/usr/lib/systemd/system/openwsmand.service'
'/etc/systemd/system/multi-user.target.wants/openwsmand.service'
# systemctl start openwsmand.service
```


1.1.11 [Action After Report] is disable shutdown at [Temp Lower Error] events.

[Action After Report] is disable shutdown at [Temp Lower Error(EventID:C0000066, C0000070)] events,
when BMC support model and ESMPRO/ServerAgentService Ver.2.0.9-0 or later.

If you want enable shutdown at [Temp Lower Error(EventID:C0000066, C0000070)], execute the following procedure.

1. Log in to the system as the root user.
2. Move to the directory where Control Panel is stored.
cd /opt/nec/esmpro_sa/bin/
3. Start Control Panel.
./ESMamsadm
4. Select "Syslog Events Setting".
[Syslog Events Setting] screen opens.
5. Select the [ESMCOMMONSERVICE] from "Source", using < ↑ > or < ↓ > key.
6. Select "OFF" from "Operation on source". Set using <space> key.
7. Select [C0000066] from "Event ID", using < ↑ > or < ↓ > key.
8. Press [Set...] and [Syslog Application Setting] screen opens.
9. Select [Shutdown] for which you want to modify the setting from
"Action After Report", using < ↑ > or < ↓ > key.
10. Press [ok].
11. Select [C0000070] from "Event ID", using < ↑ > or < ↓ > key,
and do procedure 7 to procedure 10.
12. Press [close].

2. About tools

Log in by all means in root user to use the tool.

2.1 The obstacle information collection tool (collectsa.sh)

Functions

Collect the information of this server to investigate the problem that occurred in this server or NEC ESM PRO ServerAgentService.

Usage

The usage of collectsa.sh is as follows.

- 1) Log in to the system as the root user.

Note

If SELinux is not disabled, a setroubleshoot message is output to the syslog.
If you want to suppress the output of messages, disable the setroubleshootd process.
<https://access.redhat.com/solutions/2762771>

- 2) Move to any directory.
- 3) Execute collectsa.sh.

Input a password of root to gather the information of the CIM provider.

The password input into gathered information is not included.

```
# /opt/nec/esmpro_sa/tools/collectsa.sh -auth
```

Enter password for root :

collectsa.tgz is made in the current directory.

- 4) Contact us. According to the guidance in charge of us, provide collectsa.tgz.

Note

If the root password contains one of the ¥ spaces @ , run it with the following command:

```
# /opt/nec/esmpro_sa/tools/collectsa.sh
```

Tips

If the information collected by Obstacle information collection tool has a large number of directories or files below, or if the file size is large, it may take several hours to gather the information.

- /sys/ under directory
- /var/log/sa directory
 - System Activity Report

Tips

If the directory where Obstacle information collection tool runs is low, the collection process may not work properly and may be unintentional/stored in the directory.
Run Obstacle information collection tool in a directory with free space.

Tips

Collect partition information with obstacle information collection tool. Depending on your configuration, the CPU may be high. If necessary, collect with the "-nas" flag.

```
# /opt/nec/esmpro_sa/tools/collectsa.sh -auth -nas
```

Tips

If SELinux is not disabled, output to syslog from setroubleshoot process.

"XXXXX" is different depending on the situations.

```
setroubleshoot[XXXXX]:SELinux is preventing cp ...
```

When a problem occurs for movement of the obstacle information collection tool (collectsa.sh).

The case that the obstacle information collection tool (collectsa.sh) does not work definitely (not finished), you collect the information that has been collected, and, contact us.

- 1) Terminate collectsa.sh.

1-1) Press <Ctrl> and <C> key in a terminal execute collectsa.sh.

1-2) Check collectsa.sh was finished.

```
# ps aux | grep collectsa.sh |grep -v grep
```

For example, collectsa.sh is execute in a background when it is displayed as follows.

```
#root 11313 0.0 0.4 4196 1124 pts/0 T 14:46 0:00
```

```
/bin/bash ./collectsa.sh
```

1-3) When it is executing in a background, you terminate a process.

```
# kill -9 {pid}
```

```
[example] # kill -9 11313
```

- 2) Compress "collectsa" directory which was created in the current directory in tgz.

```
# tar czvf collectsa_dir.tgz collectsa/
```

- 3) Contact us. According to the guidance in charge of us, provide collectsa_dir.tgz.

2.2 Check for necessary packages tool (check_packages.sh)

Functions

Check the necessary packages of NEC ESMPro ServerAgentService.
When the directory in which necessary packages was stocked can be prepared such as a mount does an OS installation medium, it's possible to install.

Usage

The check_packages.sh is different in a stocked directory depending on the media used for installation.
In case of EXPRESSBUILDER: {revision}/lnx/pp/esmpro_sas/check_pkg/
In case of Starter pack : software/{revision}/lnx/pp/esmpro_sas/check_pkg/
In case of Utility Disk : tools/lnx/esmpro_sas/check_pkg/
In case of the ZIP file : check_pkg/

Log in to the system as the root user.

<In case of check for necessary packages>

cd {The directory in check_packages.sh}

sh ./check_packages.sh

<In case of install for necessary packages>

1. check_pkg/ follower is copied for /tmp follower by the following example.

cp -ar {mount point}/../esmpro_sas/check_pkg/ /tmp

2. Move to the directory where check_packages.sh is stored.

cd {The directory in check_packages.sh}

3. Run the following command.

sh ./check_packages.sh -i {The directory in necessary packages}

Important

The sblim-cmpi-base-1.6.4-13.el8.x86_64.rpm included with the Red Hat Enterprise Linux 8.1 installation medium has a problem with cimprovagt being segfaulted. Therefore, it is not applicable to Check for necessary packages tool. Install sblim-cmpi-base-1.6.4-14 or later.

Tips

The necessary packages stored BaseOS/Packages and AppStream/Packages in Red Hat Enterprise Linux 9, Red Hat Enterprise Linux 8 installation medium.
Run the following command to the necessary packages is installed.

sh ./check_packages.sh -i {mount point}/BaseOS/Packages 1>/dev/null

sh ./check_packages.sh -i {mount point}/AppStream/Packages

List of messages

Information

{package name} ({architecture}) package [{OK or NG}]

All packages are installed successfully.

Please install the package of [NG].

The package of [NG] will be installed.

Usage: {tool file name} [-i directory]

-i directory Install necessary packages those are not installed.

 Directory is rpm packages's directory.

Error

ERROR: Install {package name} failed, please confirm {log file name} for detail information.

ERROR: Install perl packages failed, please confirm {log file name} for detail information.

ERROR: Not found {directory in necessary packages} directory.

ERROR: Not found {package name}

ERROR: The file {list file name} is not exist. So exit.

ERROR: This architecture is not supported. So exit.

ERROR: This kernel is not supported. So exit.

3. LICENSE

GNU LESSER GENERAL PUBLIC LICENSE(LGPL)

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.

59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so

that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in

whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is

allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this

License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals

of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>
```

```
This program is free software; you can redistribute it and/or modify
it under the terms of the GNU General Public License as published by
the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.
```

```
This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.
```

```
You should have received a copy of the GNU General Public License
```

along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.

<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

Net-SNMP

Various copyrights apply to this package, listed in various separate
parts below. Please make sure that you read all the parts.

---- Part 1: CMU/UCD copyright notice: (BSD like) ----

Copyright 1989, 1991, 1992 by Carnegie Mellon University

Derivative Work - 1996, 1998-2000

Copyright 1996, 1998-2000 The Regents of the University of California

All Rights Reserved

Permission to use, copy, modify and distribute this software and its

documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU and The Regents of the University of California not be used in advertising or publicity pertaining to distribution of the software without specific written permission.

CMU AND THE REGENTS OF THE UNIVERSITY OF CALIFORNIA DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL CMU OR THE REGENTS OF THE UNIVERSITY OF CALIFORNIA BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM THE LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

----- Part 2: Networks Associates Technology, Inc copyright notice (BSD) -----
-

Copyright (c) 2001-2003, Networks Associates Technology, Inc
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the Networks Associates Technology, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 3: Cambridge Broadband Ltd. copyright notice (BSD) -----

Portions of this code are copyright (c) 2001-2003, Cambridge Broadband Ltd.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * The name of Cambridge Broadband Ltd. may not be used to endorse or
promote products derived from this software without specific prior
written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER ``AS IS'' AND ANY
EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE
OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN
IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---- Part 4: Sun Microsystems, Inc. copyright notice (BSD) ----

Copyright © 2003 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara,
California 95054, U.S.A. All rights reserved.

Use is subject to license terms below.

This distribution may include materials developed by third parties.

Sun, Sun Microsystems, the Sun logo and Solaris are trademarks or registered
trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.

* Neither the name of the Sun Microsystems, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---- Part 5: Sparta, Inc copyright notice (BSD) -----

Copyright (c) 2003-2009, Sparta, Inc
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Sparta, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---- Part 6: Cisco/BUPTNIC copyright notice (BSD) -----

Copyright (c) 2004, Cisco, Inc and Information Network

Center of Beijing University of Posts and Telecommunications.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * Neither the name of Cisco, Inc, Beijing University of Posts and
Telecommunications, nor the names of their contributors may
be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS
IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO,
THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS;
OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR
OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF
ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 7: Fabasoft R&D Software GmbH & Co KG copyright notice (BSD) -----

Copyright (c) Fabasoft R&D Software GmbH & Co KG, 2003
oss@fabasoft.com
Author: Bernhard Penz

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * The name of Fabasoft R&D Software GmbH & Co KG or any of its subsidiaries,
brand or product names may not be used to endorse or promote products
derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER ``AS IS'' AND ANY
EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE

IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---- Part 8: Apple Inc. copyright notice (BSD) ----

Copyright (c) 2007 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Apple Inc. ("Apple") nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY APPLE AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APPLE OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

---- Part 9: ScienceLogic, LLC copyright notice (BSD) ----

Copyright (c) 2009, ScienceLogic, LLC

All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of ScienceLogic, LLC nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

MD5

```
/* Copyright (C) 1991-2, RSA Data Security, Inc. Created 1991. All
rights reserved.
```

License to copy and use this software is granted provided that it is identified as the "RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing this software or this function.

License is also granted to make and use derivative works provided that such works are identified as "derived from the RSA Data Security, Inc. MD5 Message-Digest Algorithm" in all material mentioning or referencing the derived work.

RSA Data Security, Inc. makes no representations concerning either the merchantability of this software or the suitability of this software for any particular purpose. It is provided "as is" without express or implied warranty of any kind.

These notices must be retained in any copies of any part of this documentation and/or software.

```
*/
```

Apache License

Apache License

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted"

means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.
4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and

(d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions. Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.

7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.

8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special,

incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.

9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

MIT License

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish,

distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Modified BSD License : jsonpatch

Copyright (c) 2011 Stefan Kögl <stefan@skoegl.net>
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. The name of the author may not be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE AUTHOR ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHOR BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NEC ESMPRO ServerAgentService Ver.2.3
Installation Guide (Linux)

NEC Corporation
7-1 Shiba 5-Chome, Minato-Ku
Tokyo 108-8001, Japan

© NEC Corporation 2024

The contents of this manual may not be copied or altered without the prior written permission of NEC Corporation.